

Part number

CX 02 HF



Brief description:

female insert, 2 poles, crimp connections, 16A 5000V, 15kV, 3, 2 modules, modular units series MIXO

Product description	
Model	female insert
Version	Crimp connection
Product type	for female contacts 16A
Family	MIXO series, customizable inserts
Size	2 modules
N. of poles	2 poles
Technical data	
Current	16 A (A.C. and D.C.)
Voltage	2900 - 5000 V
Rated impulse withstand voltage	15kV
Pollution degree	3
Operating temperature range (min, max)	-40°C ... +125°C
IP degree of protection	IP20 without enclosure; IP65/IP66/IP67/IP68 with enclosure
Further technical details	
Characteristics according to EN 61984	16A 2900/5000V 15kV 3
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	600V
UL 94 flammability rating	V-0
Weight	54,00 g

Approvals / Standards	
Reference standard	EN 61984:2009-06
Conformity	Not applicable
General ordering information	
EAN13 code	8015747150385
Tariff number	85369095
Packaging Information	
Sub-packaging weight	0,05 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747167895



Part number

CX 02 HF




Catalogue drawings

CX 02 HM

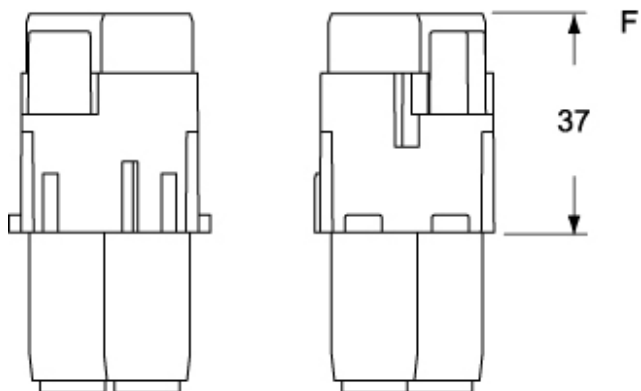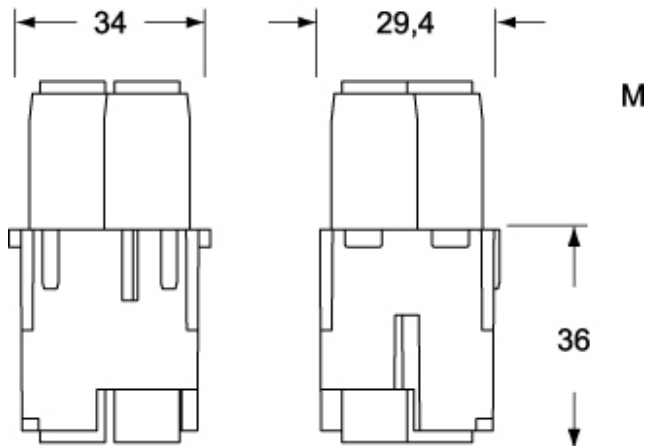

CX 02 HM

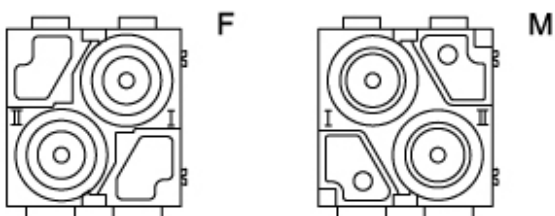

Notes

CX 02 H inserts:

- characteristics according to EN 61984:
(16A 2900/5000V 15kV 3)
- for contact crimping instructions, please see the crimping tool

section (16A contacts, CCF, CCM)
- footprint 2 modules

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support
