

Part number


CX 08 BF



Brief description:

female insert, 8 poles + shield, shielded connectors, 5A 50V, 0,8kV, 3, for 5A female contacts, modular units series MIXO

Product description	
Model	female insert
Version	shielded connectors
Product type	for 5A female contacts
Style	eight contact seats + shield
Family	MIXO series, customizable inserts
N. of poles	8 poles + shield
Technical data	
Current	5 A (A.C. and D.C.)
Voltage	50 V
Rated impulse withstand voltage	0,8kV
Pollution degree	3
Operating temperature range (min, max)	-40°C ... +70°C
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure
Further technical details	
Characteristics according to EN 61984	5A 50V 0.8kV 3
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	50V
UL 94 flammability rating	V-0
Weight	24,00 g


Approvals / Standards	
Reference standard	EN 61984:2009-06
Quality mark	 EAC
Conformity	CQC
General ordering information	
EAN13 code	8015747176620
Tariff number	85369095
Packaging Information	
Packaging weight	0,24 kg
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747176651
Sub-packaging length	105,00 mm
Sub-packaging height	70,00 mm
Sub-packaging width	110,00 mm
Sub-packaging weight	0,02 kg
Sub-packaging volume	0,81 dm ³
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747176668

Part number

CX 08 BF



Catalogue drawings

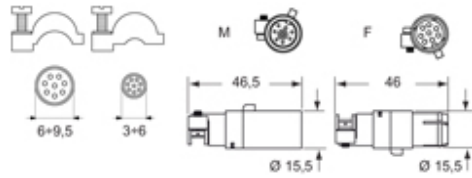

Notes

- characteristics according to EN 61984: 5A 50V 0,8kV 3
- maximum \varnothing of the insulator: 2.4 mm
- for crimp 5A contacts CI series using:
CIPZ D crimping tool
CITP D turret head
CIES insertion / removal tool
- extraction tool for BUS shielded connectors from MIXO BUS insert
part No. CX BES

the modular inserts must be installed in suitable frames which in turn
are installed in traditional housings or COB panel support