




Part number  
**CQ4F 03**



**Brief description:**

female insert, 3 poles, crimp connections, 40A, 400V, size "21.21", CLASS inserts


Product description		Approvals / Standards	
<b>Model</b>	female insert	<b>Reference standard</b>	EN 61984:2009-06
<b>Version</b>	crimp connections	<b>Quality mark</b>	 ,  , EAC
<b>Series</b>	CQ	<b>General ordering information</b>	
<b>Product type</b>	for female contacts 40A	<b>EAN13 code</b>	8015747222839
<b>Style</b>	Cable up to 7,5mm diameter	<b>Tariff number</b>	85369095
<b>Family</b>	CLASS inserts	<b>Packaging Information</b>	
<b>Size</b>	size "21.21"	<b>Packaging length</b>	210,00 mm
<b>N. of poles</b>	3 poles + 	<b>Packaging height</b>	130,00 mm
Technical data		<b>Packaging width</b>	240,00 mm
<b>Current</b>	40 A (A.C. and D.C.)	<b>Packaging weight</b>	3,20 kg
<b>Voltage</b>	400 V	<b>Packaging volume</b>	6,55 dm <sup>3</sup>
<b>Rated impulse withstand voltage</b>	4kV	<b>Packaging description</b>	Carton box
<b>Pollution degree</b>	3	<b>Packaging quantity</b>	200 Pcs
<b>Operating temperature range (min, max)</b>	-40°C ... +125°C	<b>Packaging EAN code</b>	8015747237154
<b>Mating cycles</b>	≥ 500	<b>Sub-packaging length</b>	187,00 mm
<b>IP degree of protection</b>	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure	<b>Sub-packaging height</b>	44,00 mm
<b>Further technical details</b>		<b>Sub-packaging width</b>	113,00 mm
<b>Insulation resistance</b>	≥ 10 GΩ	<b>Sub-packaging weight</b>	0,64 kg
<b>Rated voltage according to UL/CSA</b>		<b>Sub-packaging volume</b>	0,93 dm <sup>3</sup>
<b>Weight</b>	16,00 g	<b>Sub-packaging description</b>	Carton tray
		<b>Sub-packaging quantity</b>	40 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747222877

Part number

# CQ4F 03



## Catalogue drawings

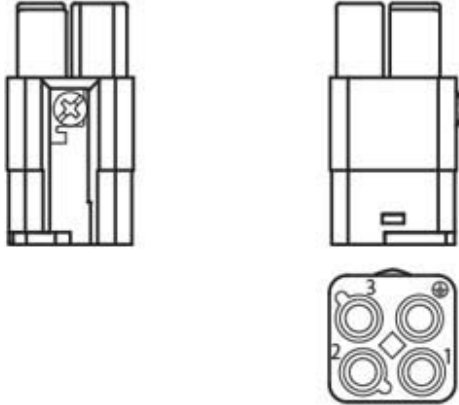

## Derating curves

