Part number

CX 02 4HF





female modular insert, Mixo series, crimp connection, 2 poles, 2 modules, 40 A 2900/5000 V 15 kV 3, with heat-shrinking tube

Product description

Product type modular insert

Series Mixo

Connection type crimp connection

Gender female N. of poles 2 poles Size 2 modules

Specification with heat-shrinking tube

Technical data

Current 40 A

2900 - 5000 V Voltage

Rated impulse 15 kV withstand voltage **Pollution degree** 3

IP degree of IP20 without enclosure,

IP65/IP66/IP68/IP69 with enclosure protection

Further technical details

Characteristics according to EN 61984 ⁴⁰ A 2900/5000 V 15 kV 3

Mating cycles ≥ 500 Insulation resistance $\geq 10 \text{ }G\Omega$

Operating

temperature range

-40 °C ... +125 °C

(min, max)

UL 94 flammability

rating

V-0

Material properties

Main material polycarbonate Colour RAL 7032 grey

General ordering information

EAN13 code 8015747271394

Packaging Information

Sub-packaging Plastic bag description

Sub-packaging 1 Pcs quantity


Sub-packaging EAN 8015747271400 barcode

Part number

CX 02 4HF



Derating curves

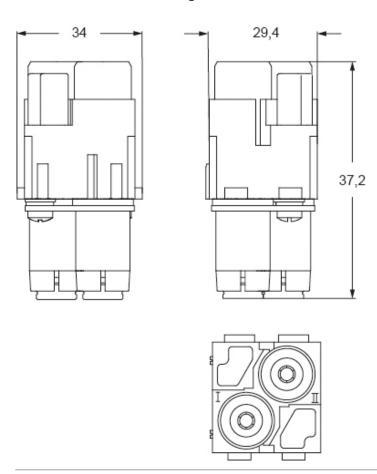

Notes

Dimensions shown in mm are not binding and may be changed without notice.