

Part number

CX 20S IM



male modular insert, Mixo series, crimp connection, 20 poles, 1 module, 4 A 32 V 0,8 kV 3, shielded

Product description

Product type	modular insert
Series	Mixo
Connection type	crimp connection
Gender	male
N. of poles	20 poles
Size	1 module
Specification	shielded

Technical data

Current	4 A
Voltage	32 V
Rated impulse withstand voltage	0,8 kV
Pollution degree	3
Rated voltage according to UL/CSA	32 V
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Characteristics according to EN 61984	4 A 32 V 0,8 kV 3
Mating cycles	≥ 500
Insulation resistance	≥ 10 GΩ
Weight	39,50 g
Operating temperature range (min, max)	-40 °C ... +85 °C
UL 94 flammability rating	V-0

Material properties

Main material	polycarbonate
Colour	RAL 7032 grey

General ordering information

EAN13 code	8015747271226
-------------------	---------------

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging weight	0,44 kg
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747271233
Sub-packaging weight	0,04 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747271240

Part number

CX 20S IM



Catalogue drawings

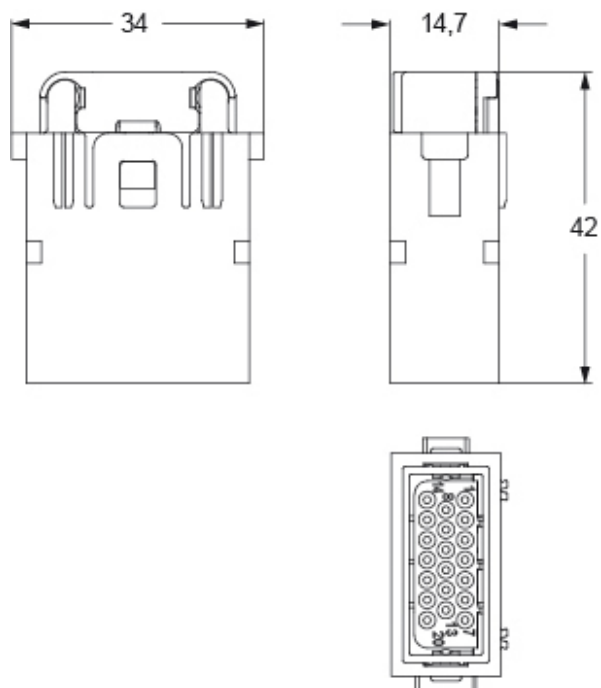

Notes

Dimensions shown in mm are not binding and may be changed without notice.