

Part number

CSAHF 10



Brief description:

Female insert, 10 poles + PE, SQUICH terminal connections, 16A, 250V, 4kV, 3, silver plated, size "49.16", CLASS insert series

Product description		Approvals / Standards	
Model	female insert	Reference standard	EN 61984:2009-06
Version	SQUICH® Spring connection contacts	Quality mark	DNV GL, BV, EAC
Series	CSAH	Conformity	CQC, CE
Product type	with female contacts	General ordering information	
Family	CLASS inserts	EAN13 code	8015747214575
Size	size "49.16"	Tariff number	85369095
N. of poles	10 poles +	Country of origin	Made in EU (IT)
Technical data		ETIM classification	EC000438
Current	16 A (A.C. and D.C.)	Packaging Information	
Voltage	250 V	Packaging length	230,00 mm
Rated impulse withstand voltage	4 kV	Packaging height	110,00 mm
Pollution degree	3	Packaging width	130,00 mm
Wire cross-section	0,14 mm ² - 2,50 mm ²	Packaging weight	1,63 kg
AWG size	26 - 14	Packaging volume	3,29 dm ³
Operating temperature range (min, max)	-40°C ... +125°C	Packaging description	Carton box
Contact type	silver plated	Packaging quantity	30 Pcs
Mating cycles	≥ 500	Packaging EAN code	8015747214612
IP degree of protection	IP20 without enclosure, IP65/IP66 with enclosure	Sub-packaging length	127,00 mm
Further technical details		Sub-packaging height	45,00 mm
Characteristics according to EN 61984	16A 250V 4kV 3; 16A 230/400V 4kV 2	Sub-packaging width	63,00 mm
Insulation resistance	≥ 10 GΩ	Sub-packaging weight	0,27 kg
Contact resistance	≤ 0,3 mΩ	Sub-packaging volume	0,36 dm ³
Rated voltage according to UL/CSA	600V	Sub-packaging description	Carton tray
UL 94 flammability rating	V-0	Sub-packaging quantity	5 Pcs
Conductors stripping length	9...11 mm	Sub-packaging EAN barcode	8015747214629
Weight	54,33 g		



Part number

CSAHF 10



Notes

SQUICH® connection with actuator button

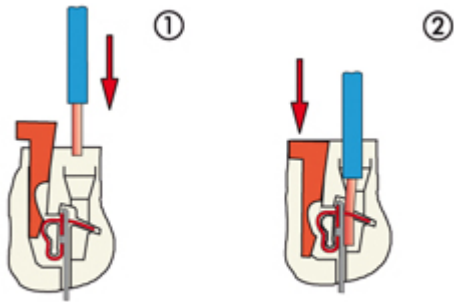

Reopening