


N8100-0059

N Jack Crimp

75Ω

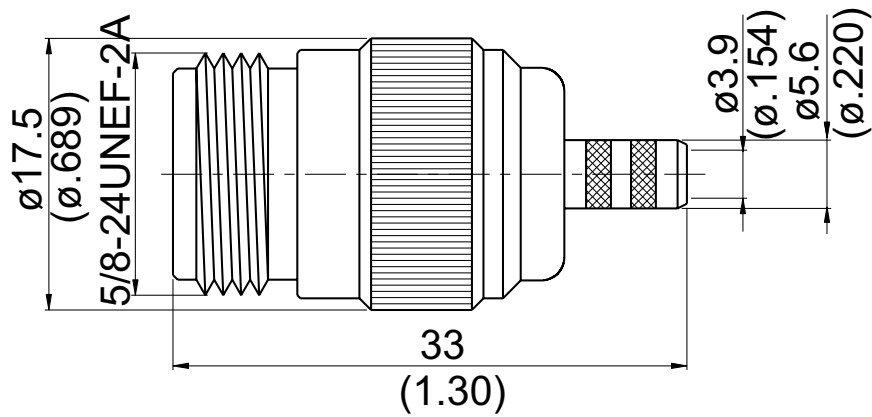

Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 30.12 g

Suitable Cables: RG59

This part number complies with RoHS.

# CABLE ASSEMBLY INSTRUCTION

N8100-0059

N8100-0059

DATE

2014/04/29


REV

—

A

B

C




BODY

CONTACT PIN


FERRULE

DIAGRAM


ASSEMBLY INSTRUCTION

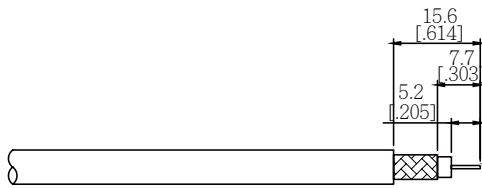


Step 1: STRIP AS SHOWN.



Step 2: SLIDE FERRULE " C " OVER CABLE.  
 Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y ".  
 (USE SQUARE 1.6mm/0.063inch SECTION OF INSERT-E IF CRIMPED)

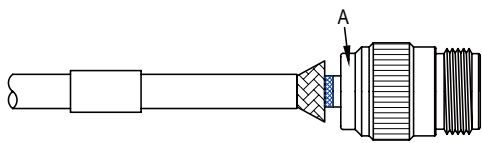

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.

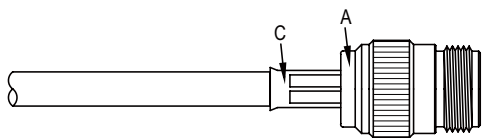

Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP.  
 (USE 6.5mm/0.256inch HEX SECTION OF INSERT-E IF CRIMPED)

This part number complies with RoHS.