


BNC3100-0213

BNC Plug Crimp

50Ω

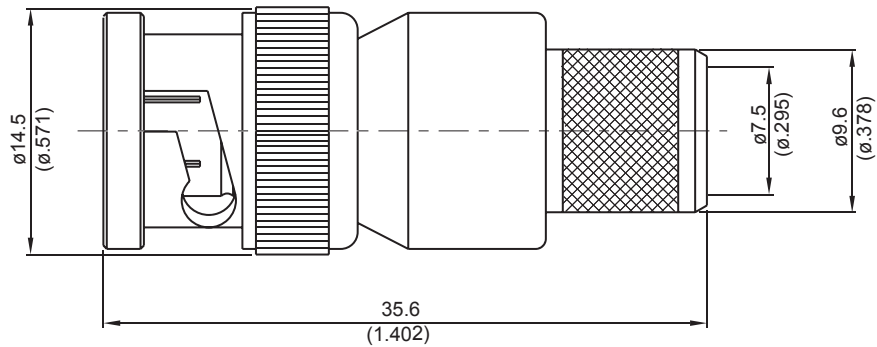

| Parts | Material | Plating (Micro-inch) |
|--------------|----------|--|
| Ferrule | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Center Pin | Brass | Gold 3 Over Nickel 50 Over Copper 50 |
| Gasket | Silicone | |
| Spring | SK5 | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Washer | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Barrel | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Insulator | Teflon | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |


Weight: 20.54 g

Suitable Cables: RG213

This part number complies with RoHS.

CABLE ASSEMBLY INSTRUCTION

BNC3100-0213

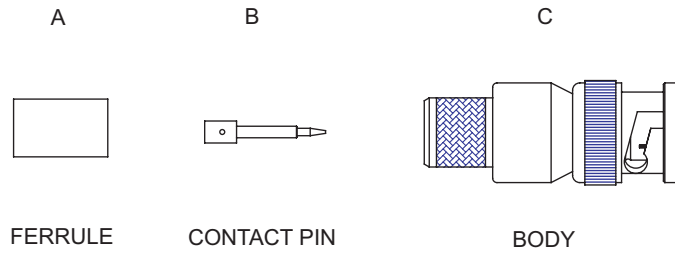

| DIAGRAM | ASSEMBLY INSTRUCTION |
|---------|--|
| | <p>Step 1: STRIP AS SHOWN.</p> |
| | <p>Step 2: SLIDE FERRULE "A" OVER CABLE. Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND SOLDER IN "Y".</p> |
| | <p>Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "C" IN PLACE.</p> |
| | <p>Step 5: SLIDE FERRULE "A" TOWARDS THE CONNECTOR AND CRIMP.</p> |

This part number complies with RoHS.